

TruFuze

SelfSeal TAPE



For Use Under

- Laminate ★★★
- Engineered Wood ★★★

Installation Methods

- Floating Floors



MOISTURE PROTECTION

Fusion Sealed surface and self-seal lip and tape system offers above industry standards in moisture protection.




COST EFFECTIVE

This is an ideal, economical underlayment solution on your floor.



MADE FROM 100% RECYCLED FOAM PRODUCTS

Made from 100% recycled post-industrial materials.

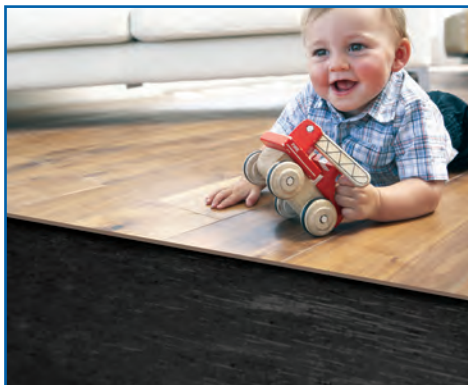

INSTALLATION METHODS

FLOATING FLOORS

1. Roll out underlayment vapor barrier side up and butt seams together
2. Tape seams with moisture barrier seam tape
3. Click & lock floating floors over the top according to manufacturer

*ENSURE TO READ THE COMPLETE INSTALLATION INSTRUCTIONS BEFORE INSTALLATION

ADVANTAGES

- Cost Effective
- Humidity, mold and mildew resistant
- Film lip and self-sealing edge tape for ease of installation and additional moisture protection
- Patent Pending Fusion Sealed technology for moisture protection and industry leading "lay flat" ease of installation

LIMITATIONS

Trufuze SS is not suitable for use as underlayment for:

- Ceramic tile
- Carpet
- Sheet-vinyl
- VCT

Installations over concrete in high moisture areas (vapor emission rate above 3 lbs/ 1000 sq ft/ 24 hrs) will require additional protection such as a concrete sealant or polyethylene vapor barrier.

APPROVED SUBSTRATES

- Completely Cured Concrete
- Cement Backer Units
- Interior Plywood
- OSB (Approved for use over properly prepared OSB)

*All wood and concrete subfloors must be flat within 1/8" over a 6' span, or 3/16" over a 10' span. All areas must be checked prior to installation.

TECHNICAL DATA

- Thickness 2.5mm
- Density 2# (+/-10%)
- WVTR..... 0.28 lbs / 1000 Sq Ft / Day (Black 100% Recycled)
.....0.30 lbs / 1000 Sq Ft / Day (Virgin Material)

SOUND PROPERTIES

Unavailable for this product

PACKAGING

48" x 25' (100 sq ft) do-it-yourself size rolls.

Rolls per pallet: 120

Rolls per box: 20

Pallets per truck: 26

Boxes per pallet: 6



FF100480100SS